

[May 22, 2022 Step by Step Guide to Prepare for H12-831_V1.0-ENU Exam BrainDumps [Q83-Q97]



[May 22, 2022] Step by Step Guide to Prepare for H12-831_V1.0-ENU Exam BrainDumps [Q83-Q97]

May 22, 2022 Step by Step Guide to Prepare for H12-831_V1.0-ENU Exam BrainDumps
HCIP-Datacom H12-831_V1.0-ENU Real Exam Questions and Answers FREE Updated on 2022

NEW QUESTION 83

Which of the following are not included in the security protection actions that a secure MAC address can perform?

- * Protect
- * Restrict
- * Shutdown
- * Remark

NEW QUESTION 84

As shown in the figure, the operator's BGP/MPLS IP VPN backbone network builds SP through DP. If you want to implement user X If the two sites communicate through the BGP/MPLS IPVPN network, PE1 and PE2 must use a 32-bit masked loopback interface address to establish an MP-IBGP peer relationship.

- * True

* False

NEW QUESTION 85

The description of the MPLS forwarding mechanism is correct

- * The system automatically allocates a I. also known as Tunnel ID
- * when IP message entry MRLS domain, the first thing to look at is FIB surface
- * if Tunnel ID value is not 0x0, into the normal IP Forwarding process
- * if Tunnel ID value is 0x0 test entry MPLS Forwarding process


NEW QUESTION 86

As shown in the figure, MPLS LSP is set up in the network, and the goal is to establish an LDP session between SWA and SWB.

```
[SWA]mp(s Isr-kl 1.1.1.1 [SWA]mpls [SWA-mp(s]mpls ldp [SWA-mpls-ldp]qui [SWA]inte V1
.[SWA-Vlanif1]mpls(SWA-Vlanif1]mpte ldp
```

SWA LDP Session

```
[SWB]mpls Isr-id 1.1.1.1
(SWB]mpts [SWB-mp(s]mpls ldp [SWBmpls-ldp]qui [SWB]inte V1
[SWB-Vtanif1]mpls [SWB-Vlanif 1 ] mpls ldp
```



- * Configured correctly
- * No global enable required MPLS
- * No need to enable on the port MPLS
- * two devices mpls Isr-id cannot be configured the same

NEW QUESTION 87

Please match the command with the function implemented.

display device	查看版本信息
display version	查看内存使用率
display memory-usage	查看CPU使用率
display cpu-usage	查看板卡状态

- * display device-® Display version-® Display memory-usage-® Display cpu-usage-?
- * display device-® Display version-® Display memory-usage-® Display cpu-usage-?
- * display device-® Display version-® Display memory-usage-® Display cpu-usage-?
- * display device-® Display version-® Display memory-usage-® Display cpu-usage-?


NEW QUESTION 88

You have set IS-IS IPv6 enable under the interface, what is the meaning of this command?

- * Activate on the interfaceIPv6 IS-ISprocess1
- * Activate on the interfaceIPv6 IS-ISprocess3
- * activate on the interfaceIPv6 IS-ISprocess10
- * activate on the interfaceIPv6 IS-ISprocess2

NEW QUESTION 89

Part of the configuration of R1 is as follows. Which statement about IS-IS on R1 is correct?

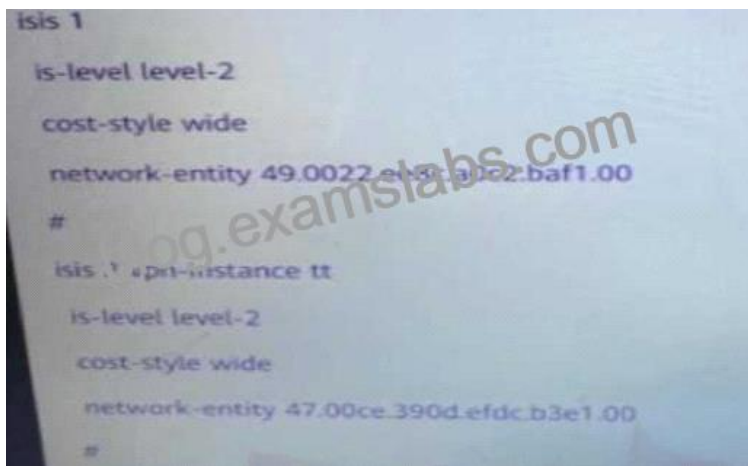

3vpn-instarwce rr

level- 2

cost-style wide

-erntity 47.ccOa 3eft)btxlci-dael

- * process2with process3The routing information is isolated
- * process1Contains only global routing information
- * process1Also contains global routing information. andVRFtt,rrrouting information
- * process2with process3routing information will be shared

NEW QUESTION 90

Which of the following are static information coke analysis?

- * Interface Type

- * Packet loss rate
- * License
- * Equipment type

NEW QUESTION 91

During the daily troubleshooting process, engineers may need to view some alarm information of the device. Run the terminal command to enable the terminal to display the debugging/log/alarm information sent by the information center.
monitor

NEW QUESTION 92

In BGP4+, what is the content of the next hop network address field carried in the P_REA, CHLRI attribute in the Update packet?

- * Can only be a global unicast address
- * can just be a link-local address
- * Can carry link-local addresses and global unicast addresses at the same time
- * Only link-local addresses

NEW QUESTION 93

As shown in the figure, all interfaces of the router enable OSPF. The ip address identified in the figure is the IP address of the device's Loopback 0 port. R1, R2, R3, R4 are advertised in area 1, and Loopback 0 of R5 is advertised in area 2. Which of the following addresses can ping each other?



- * 10.0.3.3 and 10.0.5.5
- * 10.0.4.4 and 10.0.2.2
- * 10.0.2.2 and 10.0.3.3
- * 10.0.2.2 and 10.0.5.5

NEW QUESTION 94

In an MPLS VPN network, data packets are forwarded when they enter the public network. Will be encapsulated with two layers of MPLS labels. Which of the following description is correct about the processing of the data packet? (Multiple choice)

- * The packet is forwarded to the Egress PE device after the outer label pops up on the penultimate hop device
- * The Egress PE device correctly sends the data packet to the corresponding VPN according to the inner label

- * The outer label of the packet received by the penultimate hop device is 3
- * The Egress PE device receives untagged IP packets

NEW QUESTION 95

Network administrator A wants to use AS-Path Fiter to match routing entries with the BGP routing attribute AS_PATH [100 200 300]. Network administrator A sorts out the four configurations in the figure. Which of the following configurations can satisfy the network administrator A's requirement? (Multiple choice)

Method	Config
A	ip as-path-filter TEST permit 100 200 300
B	ip as-path-filter TEST permit _300\$
C	ip as-path-filter TEST permit ^[^100]
D	ip as-path-filter TEST permit *.

- * Method C
- * Method A
- * Method D
- * Method B

NEW QUESTION 96

What is the LSA whose flooding range is the entire autonomous system in SPFV3?

- * Link-LSA
- * As-external-LSA
- * Inter-Area-Prefix-LSA
- * Intra-Area-Prefix-LSA

NEW QUESTION 97

By executing the () command, users on different ports of the same VLAN can be completely isolated at Layer 2 and Layer 3 and cannot communicate. (Please use English lowercase letters to complete the command, and the command cannot be abbreviated)
port-isolate mode all

Ultimate Guide to Prepare H12-831_V1.0-ENU Certification Exam for HCIP-Datacom:
https://www.examlabs.com/Huawei/HCIP-Datacom/best-H12-831_V1.0-ENU-exam-dumps.html