


[2022 Get Top-Rated EMC DEP-3CR1 Exam Dumps Now [Q27-Q42]

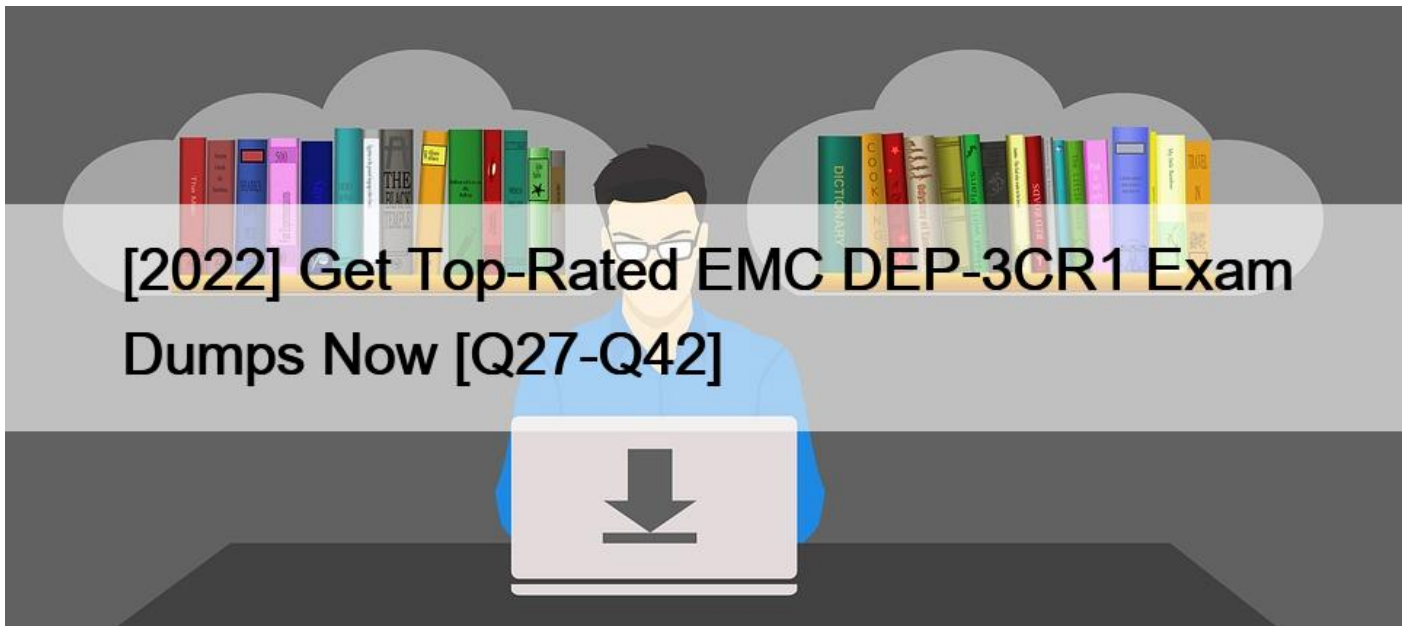

[2022] Get Top-Rated EMC DEP-3CR1 Exam Dumps Now
Passing Key To Getting DEP-3CR1 Certified Exam Engine PDF

What is the Dell DEP-3CR1 Exam?

The Dell DEP-3CR1 exam is one of the most sought-after certification exams in the IT industry today. The Dell DEP-3CR1 exam tests the candidate's ability to install, configure, and troubleshoot Dell PowerEdge servers. This exam is an entry-level certification that tests the knowledge of the fundamentals of Dell PowerEdge Servers. The test focuses on the installation, configuration, and maintenance of Dell PowerEdge servers, including Dell PowerEdge R210, Dell PowerEdge R310, Dell PowerEdge R420, Dell PowerEdge R520, and Dell PowerEdge R610 servers. The candidate must be able to install, configure, and troubleshoot the Dell PowerEdge servers. The candidate must also be able to understand the various components and features of the Dell PowerEdge server.

The Dell DEP-3CR1 exam is an important certification exam that can help you get your foot in the door at some of the best companies in the world. It's designed to test your ability to design, implement, and maintain the Dell Enterprise Storage Productivity (DEP) architecture. This article will help you understand the Dell DEP-3CR1 exam and how it can help you prepare for it. **Dell DEP-3CR1 exam dumps** will also be provided to help you prepare for the exam. That is why we recommend that you use our Dell DEP-3CR1 practice exams to prepare for the exam.

NO.27 A Cyber Recovery Administrator encounters a PowerProtect DD system that is offline and unavailable in the CR system.

What are the steps to remove this asset?

- * From the CLI, look for the asset's UID, and run the command: `crcli apps delete –uid`
- * From the Cyber Recovery UI, select Asset, select the unavailable tab, then delete
- * From the CLI, look for the asset's nickname, and run the command: `crcli dd delete -nickname`
- * From the Cyber Recovery UI, select the asset checkbox, then delete

NO.28 Why is the AWS User Canonical ID needed when emailing CyberRecoveryCloudRequest@Dell.com?

- * For access to the Cloud Formation template
- * To assign the sales order number to your account
- * To determine the AWS region to deploy Cyber Recovery
- * For access to the Cyber Recovery AMI

NO.29 What is the correct sequence to install Cyber Recovery software on a physical host?

Steps

- Install Docker components
- Install Cyber Recovery software
- Export Docker host IP
- Configure the firewall settings

Answer Area

Navigation icons: a right arrow, a left arrow, an up arrow, and a down arrow.

Steps

- Install Docker components
- Install Cyber Recovery software
- Export Docker host IP
- Configure the firewall settings

Answer Area

Navigation icons: a right arrow, a left arrow, an up arrow, and a down arrow. A red dashed box highlights the sequence: Install Docker components, Configure the firewall settings, Install Cyber Recovery software, and Export Docker host IP.

Answer Area

- Install Docker components
- Configure the firewall settings
- Install Cyber Recovery software
- Export Docker host IP

NO.30 How many PIT copies can a sandbox contain?

- * 10
- * 1
- * 2
- * 5

NO.31 In CyberSense, which term defines the function that enables and optimizes the segments for analysis and searching?

- * Index Job

- * Post Processing
- * Analysis
- * Segment

NO.32 A customer wants to recover the Avamar server inside the CR Vault. The checkpoint backup was replicated to PowerProtect DD using the CR Application. While performing the rollback, the job failed.

What is the reason?

- * Avamar server hostname and the DD Boost UID are the same as the Avamar production host
- * Avamar server host has a different IP address but the same hostname as the Avamar production host
- * Avamar server hostname is the same as Production, but the DD Boost UID is different
- * Avamar server host has the same IP address and hostname as the Avamar production host

NO.33 Which component can add advanced analytics to Cyber Recovery?

- * Dell EMC advanced analytics
- * PowerProtect Data Manager analytics embedded tool
- * NetWorker
- * CyberSense

NO.34 A company has DP8300 in the production environment. They would like to use the CR Vault.

What is the most efficient solution to replicate data to the CR Vault?

- * Replicate to DP8300 in the CR Vault to protect applications
- * Replicate the MTree owned by Multi Node Avamar directly to the CR Vault PowerProtect DD
- * Multi Nodes are not supported by Cyber Recovery, and data cannot be protected in the CR Vault PowerProtect DD
- * Replicate data from Multi Node to Single Node, then replicate the MTree owned by single node to the CR Vault PowerProtect DD

NO.35 What vault status is displayed if none of the PowerProtect DD systems in the CR Vault are able to communicate with the Cyber Recovery software?

- * Unlocked
- * Unknown
- * Degraded
- * Locked

NO.36 Which Cyber Recovery REST API section allows a user to create log bundles?

- * Notifications
- * Actions
- * Systems
- * Authentication

NO.37 What is the purpose of Denial of Service attacks?

- * launch the attack from many other host machines
- * bring down a system to initiate another attack
- * encrypt the data for ransom
- * affect the system by a business competitor

NO.38 What information is contained within the CR security guide?

- * Licensing, code integrity, security patches, and malware protection
- * Access control, log files, communication, and data security
- * Data security, access control, and manual vault security

- * Access control, log files, and manual vault security

NO.39 What must be done prior to restoring NetWorker data in the CR Vault?

- * Create a Sandbox
- * Initiate an analysis in CR
- * Perform a PIT Copy
- * Discover CR in NetWorker UI

NO.40 An enterprise customer needs a Cyber Recovery solution to be implemented. As an outcome from a previous workshop, the following backup environment needs to be protected to the CR Vault.

Location 1: 4 PowerProtect DDs

Location 2: 4 PowerProtect DDs

Location 3: 2 PowerProtect DDs

Location 4: 2 PowerProtect DDs

The customer wants to implement a CR Vault in a 5th location.

How many Cyber Recovery systems must be installed at a minimum level?

- * 5
- * 2
- * 7
- * 4

NO.41 Which feature can enable additional cyber resiliency measures to the Cyber recovery ecosystem?

- * Cloud tier
- * Retention Lock
- * DD Boost
- * Replication

NO.42 What enables and disables the air gap in cyber Recovery?

- * Backup application admin
- * Cyber Recovery software
- * PowerProtect DD admin
- * Cyber Recovery policies

DEP-3CR1 exam questions for practice in 2022 Updated 55 Questions:

<https://www.examslabs.com/EMC/PowerProtect-Cyber-Recovery-DC/best-DEP-3CR1-exam-dumps.html>