


## 2024 Realistic P-C4H340-34 Dumps Questions To Gain Brilliant Result [Q19-Q41]

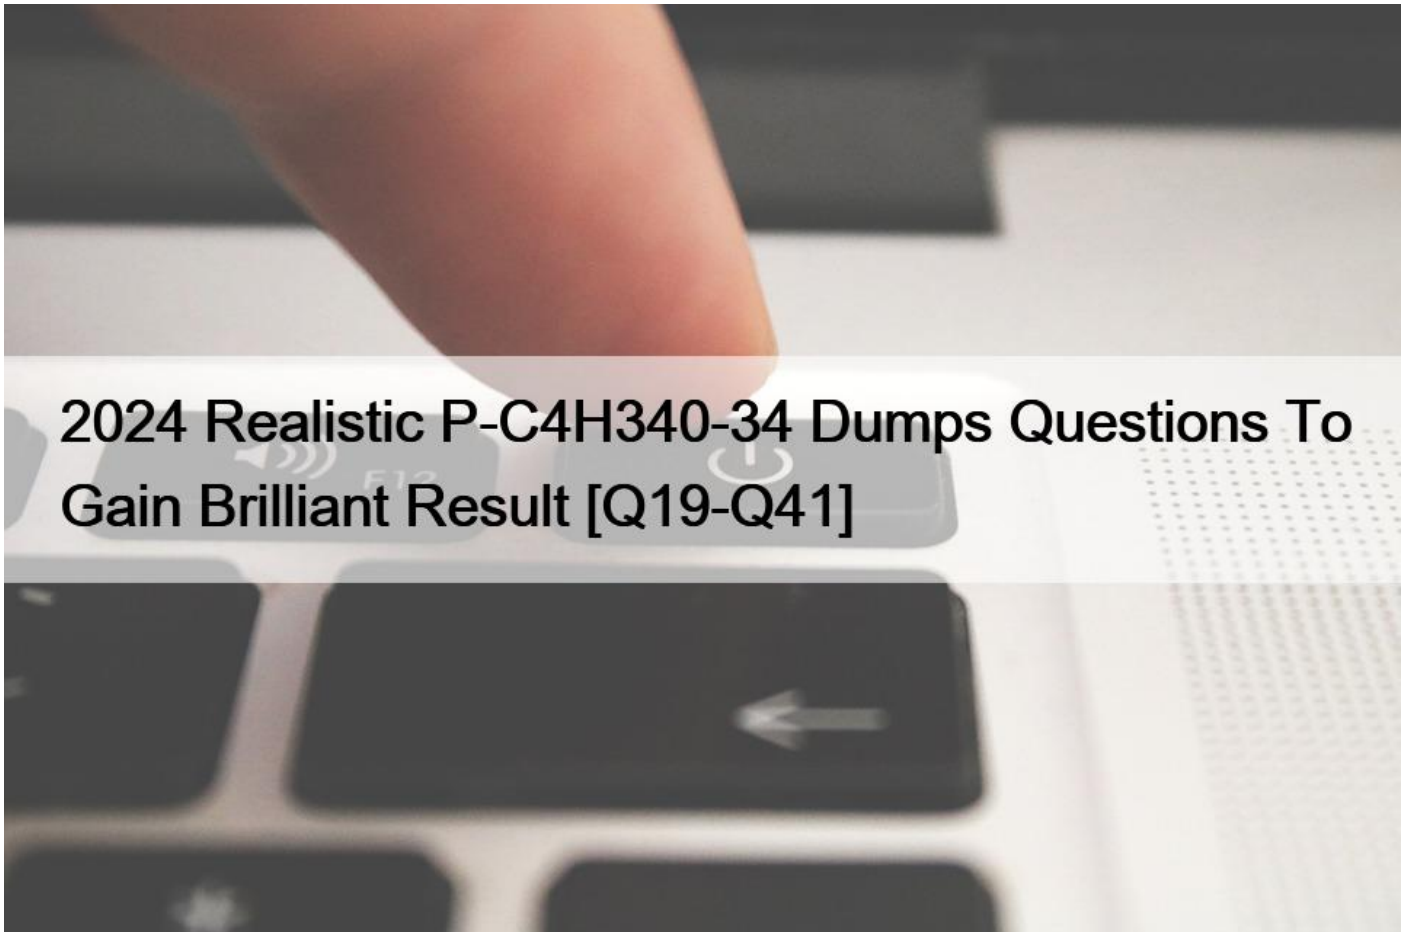

### 2024 Realistic P-C4H340-34 Dumps Questions To Gain Brilliant Result Start your P-C4H340-34 Exam Questions Preparation with Updated 84 Questions QUESTION 19

What should you pay attention to when connecting two widgets?

- \* The output socket's type does not have to be the same as the input socket's type.
- \* The input socket's type should be the same as the output socket's type.
- \* The output socket's type must be the same as the input socket type.
- \* The input socket's type must be a sub type of a composed item type.

#### QUESTION 20

What is the recommended way to deploy Solr in a production environment? Note: There are 2 correct answers to this question.

- \* Embedded with the SAP Commerce Cloud server
- \* As one leading server and multiple subordinate servers
- \* As one standalone server
- \* As a Solr Cloud

#### QUESTION 21

You are asked to define a new business process. What steps do you perform? Note: There are 3 correct answers to this question.

- \* Define the process in BPMN format.
- \* Define the actions as Spring beans.
- \* Create actions in Java code.
- \* Define actions as new item types.
- \* Define the process in XML format.

## QUESTION 22

How can you create asynchronous events in the SAP Commerce Cloud platform? Note: There are 2 ===== correct answers to this question.

- \* Implement the ClusterAwareEvent interface.
- \* Extend the AbstractEvent class.
- \* Implement the TransactionAwareEvent interface.
- \* Change the platformClusterEventSender Spring bean configuration.

## QUESTION 23

Which of the following are best practices for adding a new parameter to an existing method of CommerceCartService? Note: There are 2 correct answers to this question.

- \* Overload the existing method of CommerceCartService by adding the new parameter.
- \* Add a new property to CommerceCartParameter in a beans.xml file.
- \* Extend the default strategy called by the method to handle the new parameter.
- \* Extend the default implementation of the method to handle the new parameter.

## QUESTION 24

When a customer places an order using the default order management process defined in the Y accelerator fulfilment process extension, when does the fulfillment process send the notification that the order has been placed?

- \* After the order has been fraud checked
- \* After the order has been completely sourced
- \* At the first stage of the fulfillment process
- \* After the payment has been processed

## QUESTION 25

You are creating a new SolrIndexProperty as a facet and want to define it using facet ranges. What ===== do you need to do to achieve that?

- \* Manually create SolrValueRange items to define the range boundaries.

Create a SolrValueRangeSet, add SolrValueRange items, and add to the SolrIndexProperty.

- \* Define the number of ranges in the SolrIndexProperty.

Provide sample data that is used to

generate the SolrValueRange items.

- \* Define the cadence of the ranges in the SolrIndexProperty.

Provide the sample data that is used

to generate the SolrValueRangeSet.

- \* Create SolrValueRange items to define the range boundaries.

Add them to the SolrIndexProperty

### QUESTION 26

In Integration API Module, which of the following API verbs are controlled by access rights? Note:

There are 2 correct answers to this question.

- \* Update &#8211; POST
- \* Create &#8211; POST
- \* Create &#8211; PATCH
- \* Update &#8211; POST, PATCH

### QUESTION 27

When using monitoring support in the integration API Module, What should you pay attention to?

- \* As, it&#817;s not possible to disable the monitoring on a running server, you need to change the dedicated properties in the local properties
- \* You can monitor the inbound integration requests using the Meta API.
- \* If the number of batches in a bulk requests exceeds the time allowed, then the system records one inbound request with the payload.
- \* In outbound monitoring, if the source of the outbound request is not from outbound sync or webhooks, it is set as UNKNOW

### QUESTION 28

What can you do in the Builds workspace in Cloud Portal? Note: There are 2 correct answers to this question.

- \* Delete a build that is no longer needed
- \* View the history of the past deployments of a selected build
- \* Deploy a successful build to a certain environment
- \* Rebuild a successful build to do a performance test

### QUESTION 29

Your system contains a search restriction with the following parameters: Type: Product User:

anonymous. Restriction: 1=0. There is a product &#8220;Candle&#8221; in the online catalog and a variant product &#8220;PinkCandle&#8221; in the online catalog. The system renders the Product Detail Page for Pink Candle using the following flexible search query: &#8220;SELECT {pk} FROM {VariantProduct} WHERE{code}=&#8221;PinkCandle&#8221;. What happens next?

- \* The flexible search query returns a null value.
- \* The flexible search query returns &#8220;PinkCandle&#8221;.
- \* The flexible search query returns an SQL exception.
- \* The flexible search query returns an empty list.

### QUESTION 30

Which of the core storefront features does Spartacus support? Note: There are 3 correct answers to this question.

- \* Customer Interests
- \* Wish List
- \* B2B Scheduled Replenishment
- \* Newsletter Subscription
- \* Configurable Promotions

### QUESTION 31

Where are enumerations stored? Note: There are 2 correct answers to this question.=====

- \* Dynamic enumerations are stored in the active session.
- \* Non-dynamic enumerations are stored as SpEL lists in Spring.
- \* Dynamic enumerations are stored in the database.
- \* Non-dynamic enumerations are stored as enumeration classes.

### QUESTION 32

You have created your products and price rows using the approach displayed in the following ImpEx file: \$catalog-id=Default \$catalogversion=Staged \$catalogversion=catalogversion(catalog(id),version)

```
[unique=true,default=$catalog
```

```
-id:$catalog-version] INSERT_UPDATE
```

```
Product;code[unique=true];$catalogversion;name[lang=en];unit(code);approvalStatus(code); ;product1;;product1;pieces;approved;  
;product2;;product2;pieces;approved; #in total 1000 product data lines INSERT_UPDATE
```

```
PriceRow;productId[unique=true];price;unit(code);currency(isocode) ;product1;100;pieces;EUR ;product2;200;pieces;EUR #in  
total 1000 price row data lines. After you import this file and synchronize the catalogs (Staged to Online), how many items are  
stored in the database?
```

- \* 2000 products and 1000 price rows
- \* 1000 products and 2000 price rows
- \* 2000 products and 2000 price rows
- \* 1000 products and 1000 price rows

### QUESTION 33

You restart the platform without running `ant all`. Which of the following changes take effect?

Note: There are 2 correct answers to this question.

- \* Addition of a Spring bean definition
- \* Removal of an extension from the localextensions.xml file
- \* Definition of a new item type in the items.xml file for an extension
- \* Changes to database properties in the local.properties file

### QUESTION 34

What are the advantages of using classification attributes? Note: There are 2 correct answers to this question.

- \* Cached classification attributes provide better performance than fixed properties.
- \* Classification attributes are applied dynamically in response to customer actions.
- \* Business users can create or modify classification attribute definitions using the Backoffice.
- \* When modifying, Rebuilding and redeployment are NOT required.

### QUESTION 35

What type of class should you implement when you need to change the trigger for recalculating the user experience results?

- \* A populator
- \* An interceptor
- \* A voter
- \* A controller

### QUESTION 36

How can CronJobs be started or aborted? Note: There are 3 correct answers to this question.

- \* CronJobs can be started manually using flexible search.
- \* CronJobs can be aborted automatically if a configurable time threshold is exceeded.
- \* CronJobs can be started manually via the Backoffice administration perspective.
- \* CronJobs can be aborted only if implemented as abortable.
- \* CronJobs can be started manually via the command line by running `ant runcronjob`.

### QUESTION 37

Which of the following configurations can be done to a ContentSlot? Note: There are 2 correct answers to this question.

- \* Assign it to a maximum of one page using a ContentSlotForPage item.
- \* Add a list of CMSComponents to it.
- \* Assign it to one or more pages using ContentSlotForPage items.
- \* Define valid CMS Components for it by modifying the ElementsForSlot relation.

### QUESTION 38

Which of the following steps could be included in the process of installing an AddOn? Note: There are 3 correct answers to this question.

- \* Run `ant all`.
- \* Configure storefront properties files.
- \* Run `ant addoninstall`.
- \* Run `ant modulegen`.
- \* Copy files from the storefront to the AddOn web source folder

### QUESTION 39

Which of the following is a mechanism used by WCMS to position components on a page?

- \* The Page item has a position map that links each component to the component in the page that the item should be displayed in.
- \* The ContentSlot item's code property is used to determine which slot in the page that the item should be displayed in.
- \* The component's CurrentPosition attribute is used to determine which component within the page the item should be displayed in.
- \* The position attribute in the ContentSlotForTemplate item is used to identify the slot in the page that the item should be displayed in.

### QUESTION 40

In an Accelerator-based storefront, which of the following would allow you to display a custom CMS Component? Note: There are 2 correct answers to this question.

- \* Create a JSP named [componentTypeCode].jsp that pulls data from a [ComponentTypeCode]Data object.
- \* Configure a custom controller bean and redefine the DefaultCMSComponentController alias to point to it.
- \* Configure a renderer in the cmsComponentRendererRegistry that doesn't need to use a data object or a view.
- \* Create a controller for this component and register it in the cmsComponentControllerRegistry

#### QUESTION 41

What Solr index operation uses the indexedProperties field on the SolrExtIndexerCronJob?

- \* FULL
- \* UPDATE
- \* DELETE
- \* PARTIAL\_UPDATE

**Easy Success SAP P-C4H340-34 Exam in First Try:**

<https://www.examlabs.com/SAP/SAP-Certified-Development-Professional/best-P-C4H340-34-exam-dumps.html>